

FLEET SPECIALS

EXPIRES JANUARY 31, 2026



tifco industries

THE RIGHT PART, IN THE RIGHT PLACE, AT THE RIGHT TIME



FLEET SPECIALS

JUMP STARTERS / CHARGERS

4-IN-1 JUMP STARTER AND AIR COMPRESSOR

Jump start your vehicle, inflate your tires, charge USB-powered devices, and features an integrated floodlight for emergency roadside situations or power outages.

- USB-C rechargeable
- Up to 45 jumps on a full charge
- 3-step jump start process with spark-proof design
- High-precision air compressor
- 3-way multi-device charging
- Floodlight (White, Red & Red SOS)
- LCD display
- 24" air hose extension



Part No.	Description
45011	2,000 Peak Amps
45012	1,500 Peak Amps

BATTERY DOC®

PORTABLE CHARGER

- 12 volt 1 1/4 Amp, 3 Stage, Compact: 4" x 2 1/4" x 1 1/2"H
- Charges batteries from 5-200 Amp/hours
- Maintains batteries up to 400 Amp/hours
- Can be left on battery indefinitely without concern of overcharging
- Includes charger with 6" cables, charge indicator, battery clamp connector, terminal ring connector with inline fuse, cig plug connector and case



Part No.	Recommended For
45038	12 Volt 1.25 Amp Portable Charger

LITHIUM ION JUMP STARTER KIT

Lithium-Ion Jump Starter Kit and Charger with professional grade power that can jump start large diesels and high-compression gasoline engines.

- Professional-grade power that can easily and safely jump-start large displacement diesel and nearly any gasoline engine, even high-compression models
- Charge phones and devices faster with the quick-charge port
- Heavy-duty jump starting clamps integrated into the unit with 6-gauge cable
- Auto-shutoff feature to conserve battery life
- Integrated, flip-up COB-style LED work light and a multi-function flashlight
- Peak Amps: 4,000
- Battery Capacity: 118 Wh
- Input: Type-C 5V/2A, 9V/2A
- Output: A) USB 5V/2.1A, B) QC 5V/2A, 9V/2A, 12V/1.5A, and DC) 15V/10A
- Dimensions: 10.75" x 10.81" x 4.625"
- Weight: 5.7 lbs.



Part No.	Description	Peak Amps
45007	Lithium-Ion Jump Starter Kit	4,000

LITHIUM ION JUMP STARTER KIT

A versatile portable jump starter and power unit with quick charge.

- For use on a majority of gas and diesel-powered engines
- Charge unit faster with a quick charge input
- Internalized protections, allowing for longer cables
- Rugged jump start clamps with 100% copper inserts and anti-spark protection
- Unit packaged with all components weighs in at under two pounds
- Auto-shutoff feature to conserve battery life
- Bright, multi-function LED flashlight
- Peak Amps: 2,500
- Battery Capacity: 77.7 Wh
- Input: 5V/2A, 9V/2A
- Output: 5V/1A, 5V2.1A and jump start port
- Dimensions: 8.75" x 3.56" x 1.31" (unit) and 11.22" x 5.31" x 4.02" (packaged)
- Weight 1.6 lbs. (unit) 1.65 lbs. (packaged)



Part No.	Description	Peak Amps
45006	Lithium-Ion Jump Starter Kit	2,500

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

TIRE INFLATION

HEAVY DUTY TIRE INFLATOR

- In a side by side comparison - 30% faster than anything on the market today
- Inflate and deflate air pressure while staying engaged on the tire valve stem
- Can inflate tires up to 138 psi
- Extremely accurate with testing standards greater than +/- 2 psi (complies with EC Directive 86/217)
- Comes complete with its own individual testing calibration certificate
- Each unit is serialized with date code tied to manufacturing date
- Compliant to the current California Tire Pressure Proposal
- Hose has male NPT threads to allow customer to change out connectors



Accuracy	Exceeds EC Directive 86/217	
Reading Accuracy	2 psi	
Max Inlet Pressure	218 psi	
Inflation Flow	18 cfm @ 190 psi supply	
Calibration	0-138 psi in 2 psi units	
Complies To	EC Directive 86/217 and BS EN 12645:1999	

Part No.	Hose Length	Chuck Type
48594	21"	Straight and Angled

TIRE INFLATOR AND GAUGE

- The heavy duty solution for providing safe, cost-effective and trouble-free high pressure inflation with guaranteed accuracy
- Aluminum die cast body and linear gauge represents the best product on the market for both indoor and outdoor applications
- Each unit comes complete with its own individual testing calibration certificate and is serialized with date code tied to manufacturing date
- Compliant to the current California Tire Pressure Proposal
- In a side by side comparison - 30% faster than anything on the market today
- Inflate and deflate air pressure while staying engaged on the tire valve stem
- Hose has male NPT threads to allow customer to change out connectors
- Can inflate up to 174 psi



Reading Accuracy	± 2 psi	
Max Inlet Pressure	218 psi	
Inflation Flow	18 cfm @ 190 psi supply	
Calibration	0-174 psi in 2 psi units	
Complies To	EC Directive 86/217 and BS EN 12645:1999	

Part No.	Hose Length	Chuck Type
48593	15'	Single Lock On

DIGITAL TIRE INFLATOR

- The best product available for measuring and checking digital Tire Pressure Monitoring Systems
- Merges an easy to read digital display with rapid, safe and cost-effective tire inflation and deflation
- Combines leading electronics and sensor technology with patented software for trouble-free inflation and deflation
- Ergonomic handle and direct valve mechanism enable the operator to deliver excellent rates of inflation in comfort
- Suitable for tire shops, garages, car dealers and transport terminals
- Individually tested and certified
- Over-pressure warning if pressure exceeds 174psi
- Long battery life (1 x CR2450, Part No. 29167) with low battery warning light



Accuracy	Exceeds EC Directive 86/217 and BS EN 12645:1999	
Reading Accuracy	0.2 psi	
Max Inlet Pressure	218 psi	
Inflation Flow	32 cfm @ 190 psi supply	
Calibration	0-174 psi in 0.2 psi units	
Complies To	EC Directive 86/217 and BS EN 12645:1999	

Part No.	Hose Length	Chuck Type
48715	6'	Single Lock On

COMBINATION BLOW GUN AND TIRE INFLATOR

- Specially designed with a combination safety nozzle for both applications
- High impact plastic handle with hanging hooks
- Air consumption at 90 PSI using 1/4" hose is 13 CFM and using a 3/8" hose is 15 CFM
- 1/4" NPT Female brass air inlet
- Minimum pressure for tire inflation is 90 PSI
- 90-120 PSI operating range
- Lever action
- Lightweight



Part No.	Description
48771	Combination Blow Gun and Tire Inflator

LARGE BORE SWIVEL FOOT GAUGE

- Made out of Nickel-plated brass
- Nylon slide bar
- Easy to read
- Calibrated 10 - 150 in 2lb. units
- Swivels 360 degrees for hard to reach valves



NEW



Part No.	Description
48724	Large Bore Swivel Foot Gauge

⚠ WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

FLEET SPECIALS

TIRE REPAIR

REMA PATCHES

RED EDGE ROUND

- Specially formulated high elongation compound allows for size distortion
- Repaired tubes can be returned to service immediately after repair
- Feather edge provides superior bonding, no edge curling
- Use with Part No. **13147** cement



Part No.	Size	Box Qty.
12911	#1 - 1 1/2"	30
12912	#2 - 1 3/4"	30
12913	#3 - 2"	30
12914	#4 - 3"	30
13147	Cement 8 oz.	-



13147

VULCANIZING CEMENT

- For chemical or heat vulcanization
- Used with repair patches and inserts
- For large reinforced patches coat inner liner and patch with cement

Part No.	Size	Description
13153	8 oz.	Brush Top Can



UNIVERSAL ROUND

Universal Round repair unit can be applied in any direction, in any repairable area in a radial or bias ply car tire. They are ideal inner liner patches to completely fill the injury and patch the inner liner, as recommended by the Rubber Manufacturers Association (RMA).



Part No.	Size	Box Qty.
12920	Small - 1 3/4", 45mm	25
12921	Medium - 2 1/4", 57mm	25
12922	Large - 3 1/8", 79mm	25

UNIVERSAL SQUARE

Square Radial patches have a core of blue gum which flows to the injury, closing very small holes in the process.



Part No.	Size	Box Qty.
12917	2 1/8" x 54mm	25
12918	3 1/8" 79mm	15

AIR BUFFER & ACCESSORIES

Mighty-Mite variable speed buffer kit includes:

- Buffer
- 24" x 3/8" swivel whip hose
- In-line regulator 1/4" NPT
- 2 1/2" light duty carbide buffing wheel (#13171)
- 3/8" x 1/2" arbor adapter
- 2" heavy duty carbide buffing wheel (#13172)



Part No.	Description
13170	10,000 RPM Air Buffer Kit

BUFFING WHEELS

- Buffing wheels are used to scuff the surface of the rubber to prepare for the plug or patch
- Holes dissipate heat for longer tool life, and prevent scorching
- Maximum operating speed: 2,500 rpm



13171



13172



13174

Part No.	Description	Arbor
13171	2 1/2" Carbide Buffing Wheel	3/8"
13172	2" Heavy Duty Buffer Wheel	3/8-24
13174	Arbor with Back to Back 2 1/2" Carbide Wheels	3/8"

MULTI-USE TIRE REPAIR INSERT KIT

- Contains 2 T-Bone handles (probe and needle) lube, razor, screwdriver, wrench, 10 4" large, 10 4" small, 10 6" small string inserts, case



Part No.	Description
12949	Multi-Use Kit

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

TIRE PRESSURE MONITORING SYSTEM

TPMS SERVICE TOOL KIT

- Contains all of the tools needed to service and install TPMS sensors and service kits
- All tools are stored and organized in a sturdy plastic case
- Kit includes: Torque wrench with 11mm and 12mm sockets, Torque tool for valve and sensors, Valve core torque tool, Grommet removal tool and Grommet pick tool



Part No.	Description
23804	TPMS Service Tool Kit

TPMS VALVE CORE TORQUE TOOL

- Tightens valve cores to OE specifications, 3.5-4 in-lbs. (.45N-m)
- Meets industry recommended torque valves
- Can also be used to remove valve cores



Part No.	Description
23800	TPMS Valve Core Torque Tool

TPMS GROMMET REMOVAL TOOL

- Used to remove old grommet from the aluminum TPMS valve stem



Part No.	Description
23801	TPMS Grommet Removal Tool

TPMS GROMMET PICK TOOL

- Used to help remove old or broken grommets from the aluminum TPMS valve stem



Part No.	Description
23802	TPMS Grommet Pick Tool

TPMS 4-WAY VALVE TOOL

- Used for removing sensor nuts and seating the sensor
- Can be used to remove 11mm and 12mm nuts



Part No.	Description
23803	TPMS 4-Way Valve Tool

TPMS SENSOR

- TPMS sensor program provides coverage for over 80% of Domestic and Asian cars and light trucks on the market
- Features dual valve technology and installs right out of the box
- Ideal product for replacing OE sensors when the original battery (that cannot be replaced) dies
- Compatible with all TPMS activation scan tools
- Work with a rubber snap-in valve stem or a metal clamp-in valve stem
- Designed and tested to OE requirements

Part No.	Description
23700	TPMS Sensor



TPMS SENSOR REPLACEMENT VALVES



UNIVERSAL REPLACEMENT VALVES

Part No.	Description	Vehicle Make
23723	Aluminum	Acura, Honda (Long Valve)
23724	Aluminum	Acura, Honda (Short Valve)
23725	Rubber	GM, Chrysler, Dodge, Ford, GMC, Hummer, Jeep, Mazda, Mercury, Subaru, Suzuki
23726	Rubber	Cadillac ATS, Dodge Dart
23728	Aluminum	GM, Chrysler, Dodge, Ford, GMC, Hummer, Jeep, Mazda, Mercury, Subaru, Suzuki
23729	Aluminum	Chrysler, Dodge, Jeep, Mercedes
23730	Aluminum	Adjustable Valve for Chrysler, Dodge, Honda, Jeep

VALVE CORES

- 0-200 PSI
- Nickel plated brass

Part No.	Description
48745	TPMS Valve Core



⚠ WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

FLEET SPECIALS

CARGO CONTROL

TARP STRAPS

- Faster and easier than rope
- Rubber compound has excellent sun and weather resistance



Part No. 10/Pack	Part No. 50/Pack	Strap Length	Overall Length
35284	35306	10"	13"
35285	35307	15"	18"
35286	35308	21"	24"
35287	35309	31"	34"
35288	35310	41"	44"

POLYURETHANE - TARP STRAPS

HIGH STRENGTH

- Virtually unbreakable, incredibly elastic, stretches up to 3 times length
- Impervious to most chemicals, oils, road salts, won't rot
- Galvanized "S" hooks



Part No.	Length
35276	12"
35277	18"
35278	24"
35279	31"

INDUSTRIAL POWER PULL BUNGEE

- Industrial strength 1/2" bungee cord
- Patented hook features a pull loop that is much safer than current hooks
- Simply stick your finger in the pull hook, stretch and attach
- Safe and easy to use

1/2" DIAMETER - 10/PKG.

Part No.	Length
35280	18"
35281	24"
35282	36"
35283	48"




WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

CARGO NET

- Net is made of rubber strands with a polypropylene cover
- Hooks are made of a polycarbonate material
- Secures cargo
- Stretches and adjusts for a tight fit

NEW

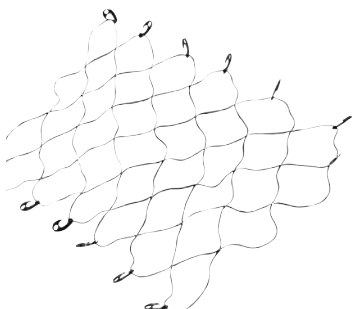

Part No.	Description
35396	36" x 48"
35397	52" x 70"
35398	72" x 96"

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

ROPE RATCHET

- Easy-to-use, no complicated knot to tie
- Automatically locks rope in place to eliminate slipping
- Tough, weather resistant nylon construction provides years of service
- Can be used with any rope or cord of required diameter



Part No.	Ratchet Size	Rope Length	Load Limit
35265	1/4"	8 Ft.	150 lbs.
35266	3/8"	8 Ft.	250 lbs.
35271	1/2"	12 Ft.	500 lbs.

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

NYLON ROPE

- Braided rope provides greater abrasion resistance than twisted rope
- Retains round shape under heavy loads



Part No.	Size	Length	Rating	Load Limit
35268	1/4"	100 Ft.	1400 lbs.	250 lbs.
35269	3/8"	100 Ft.	2800 lbs.	500 lbs.
35272	1/2"	100 Ft.	4400 lbs.	880 lbs.
35273	1/2"	50 Ft.	4400 lbs.	880 lbs.
35380	1/4"	1000 Ft.	1400 lbs.	250 lbs.
35381	3/8"	1000 Ft.	2800 lbs.	500 lbs.
35382	1/2"	1000 Ft.	4400 lbs.	880 lbs.

TRUCK ROPE

- Secures loads to improve safety for everyone else on the road, while ensuring you do not lose your cargo
- Polypropylene rope floats, which makes it ideal for marine applications
- California DOT approved
- U.V. stabilized

NEW



Part No.	Size	Length	Breaking Strength
35225	1/4"	600 Ft.	1,125 lbs.
35227	3/8"	600 Ft.	2,430 lbs.
35228	1/2"	600 Ft.	3,780 lbs.

POLY TARPS

- Heavy duty silver/brown reversible
- 10 mil, twice as thick, stronger and more tear resistant than standard blue poly tarps
- 5.5 oz. per sq. yd. 14 x 14 weave, UV treated, reinforced corners
- Grommets every 18 inches
- Keeps covered surfaces cooler, protects against UV radiation



Part No.	Size
12691	8 x 10 Ft.
12692	10 x 12 Ft.
12693	10 x 20 Ft.
12696	16 x 20 Ft.
12697	20 x 30 Ft.



CARGO CONTROL

SELF TENSIONING RATCHET STRAP

- Automatically tightens the webbing if there is a load shift
- Ratchet features 2 large coil springs that in the case of a load shift, the ratchet will re-tighten taking up a maximum of 2" of webbing
- Chromate finished hardware protects against damaging your cargo
- D.O.T. compliant printed web
- Double J-Hooks



Part No.	Size	Break Strength	Working Load Limit
35118	1 1/2" x 15 Ft.	4000 lbs.	1,333 lbs.
35120	2" x 27 Ft.	10,000 lbs.	3,300 lbs.

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

RATCHETING TIE-DOWNS

- Wide molded rubber handles makes tightening easy on the hands
- Easy to use, durable and secure



Part No.	Size	Break Strength	Working Load Limit	Pkg. Qty.
35121	1" x 15 Ft.	2000 lbs.	665 lbs.	2
35122	1 1/4" x 12 Ft.	2500 lbs.	833 lbs.	

WINDER RATCHET

- Winder allows extra webbing to be stored with a twist of the wrist, no need to tie knots with extra webbing or risk flying around during transportation
- Cap lock holds the hook onto the anchor point, making installation easier and the strap more reliable
- 15 Ft. length with soft ratchet handle



Part No.	Size	Break Strength	Working Load Limit	Pkg. Qty.
35094	1" x 15 Ft.	1200 lbs.	400 lbs.	2

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

RATCHETING TIE-DOWN W/WEB CLAMP

- Designed to address the problem of what to do with excess webbing
- Mechanism is similar to a mouse trap, lift the spring loaded clamp and place the folded webbing under the clamp, release the clamp and the excess web is "caught"
- Very simple and effective



Part No.	Size	Break Strength	Working Load Limit
35116	1" x 15 Ft.	1500 lbs.	500 lbs.

RETRACTABLE RATCHET STRAPS

- Very easy to use, simply ratchet tight and push down on the red button to release and the web rewinds into the housing
- Innovative retractable ratchet system stores unused web in center compartment



Part No.	Size	Break Strength	Working Load Limit	Pkg. Qty.
35123	1" x 10 Ft.	1200 lbs.	400 lbs.	2
35124	2" x 10 Ft.	3300 lbs.	1100 lbs.	

CARGO STRAPS

SLIDING RATCHET

- Sliding ratchet allows you to move the ratchet on the strap to enable you to secure loads in corners and tight spaces
- Two (2) sliding ratchet straps



Part No.	Size	Break Strength	Working Load Limit	Pkg. Qty.
35115	1 1/4" x 14 Ft.	2000 lbs.	665 lbs.	2

FLEET SPECIALS

AUTOMOTIVE BOLT AND NUT TRAY ASSORTMENTS



GM METRIC AUTOMOTIVE BOLT & NUT ASSORTMENT

85189

 M6-1.00 U-NUT	 M6-1.00 U-NUT	 M6-1.00 U-NUT	 M6-1.00 FREE SPINNING WASHER NUT	 M6-1.00 X 20 HEX WASHER HD
 AUTOMOTIVE SEMS BODY BOLT GM M6-1.00 X 25	 M6-1.00 X 16 HEX HEAD SEMS	 M6-3-1.00 U-NUT	 M6-3-1.00 FREE SPINNING WASHER NUT	 M6-3-1.00 X 20 HEX WASHER HD
 M6-1.25 U-NUT	 M6-1.25 U-NUT	 M6-1.25 J-NUT	 M6-1.25 HEX FLANGE NUT	 M6-1.25 X 20 HEX WASHER HD
 M6-1.25 X 25 HEX WASHER HD	 M6-1.25 X 25 HEX WASHER HD	 M6-1.25 X 30 HEX WASHER HD	 M6-1.25 X 30 HEX WASHER HD	 M6-1.25 X 35 HEX WASHER HD

275 Pcs.



GM HEX HEAD SEMS BODY BOLT ASSORTMENT

85462

 M6 X 16 AUTOMOTIVE SEMS BODY BOLT	 M6-1.00 X 20 17MM WASHER O.D.	 M6-1.00 X 20 24MM WASHER O.D.	 M6-1.00 X 20 AUTOMOTIVE BODY BOLT	 M6-1.00 X 20 BLACK 17MM WASHER O.D.
 M6-1.00 X 25 17MM WASHER O.D.	 M6-1.00 X 25 24MM WASHER O.D.	 M6-1.00 X 30 24MM WASHER O.D.	 M6-1.00 X 35 17MM WASHER O.D.	 M6-3-1. X 20 AUTOMOTIVE BODY BOLT
 M6-3-1.00 X 20 17MM WASHER O.D.	 M6-3-1.81 X 25 24MM WASHER O.D.	 M6-3-1.00 X 25 17MM WASHER O.D.	 M6-3-1.81 X 30 24MM WASHER O.D.	 M6-1.25 X 25 24MM WASHER O.D.
 M6-1.25 X 30 24MM WASHER O.D.	 M6-1.25 X 30 AUTOMOTIVE BODY BOLT	 M6-1.25 X 35 24MM WASHER O.D.	 M10-1.50 X 30 29MM WASHER O.D.	 M10-1.50 X 40 29MM WASHER O.D.

275 Pcs.



DOMESTIC AUTOMOTIVE BODY BOLT AND U-NUT ASSORTMENT

85321

 #14 X 3/4 HEX WASHER HEAD	 1/4-20 X 7/8 HEX HEAD SEMS W/DOG PT	 1/4-20 X 1" HEX HD SEMS W/WASHER
 5/16-18 X 13/16 HEX WASHER HEAD SEMS	 5/16-18 X 1" HEX HEAD SEMS	 5/16-18 X 1 1/16 HEX HD SEMS W/DOG POINT
 3/8-16 X 1" HEX HD SEMS W/WASHER	 3/8-16 X 1 1/2 HEX HD SEMS W/WASHER	 1/4-20 EXTRUDED U-NUT
 5/16-18 EXTRUDED U-NUT	 5/16-18 EXTRUDED U-NUT	 3/8-16 EXTRUDED U-NUT

195 Pcs.



FORD BODY BOLT ASSORTMENT

85461

 M6-1.00 X 20 HEX HEAD SEMS	 M6-1.00 X 20 AUTOMOTIVE SEMS BODY BOLT	 M6-1.00 X 22 HEX HEAD SEMS WIDOG PT	 M6-1.00 X 26 PAN HD TORX DRIVE SEMS	 M6-1.00 X 28 HEX HEAD SEMS WIDOG PT
 M6-1.00 X 26 HEX HEAD SEMS WIDOG PT	 M6-1.00 X 30 HEX WASHER HEAD	 M6-1.00 X 30 HEX HEAD SEMS WIDOG PT	 M6-3-1.81 X 16 HEX HEAD SEMS	 M6-3-1.0 X 20 AUTOMOTIVE SEMS BODY BOLT
 M6-3 X 25 AUTOMOTIVE SEMS BODY BOLT	 M6-1.25 X 30 AUTOMOTIVE SEMS BODY BOLT	 M6-1.25 X 33 HEX HEAD SEMS WIDOG PT	 M6-1.50 X 30 HEX HEAD SEMS	 3/8-16 X 1" AUTOMOTIVE BODY BOLT
 #14 X 3/4 HEX WASHER HEAD	 #14 X 3/4 HEX WASHER HEAD	 1/4-20 X 7/8 HEX HEAD SEMS WIDOG PT	 5/16-18 X 1" HEX HEAD SEMS	 5/16-18 X 1 1/16 HEX HEAD SEMS WIDOG PT

245 Pcs.



AUTOMOTIVE BODY BOLT & NUT ASSORTMENT

84736

 M6-1.00 EXTRUDED U-NUT	 M6-1.00 FREE SPINNING WASHER NUT	 M6-1.00 X 20mm HEX WASHER HEAD	 M6-1.00 X 20mm HEX HEAD CA POINT	 M6-1.00 X 22mm HEX HEAD DOG POINT
 M6-1.00 EXTRUDED U-NUT	 M6-1.25 FREE SPINNING WASHER NUT	 M6-1.00 X 25mm HEX HEAD CA POINT	 M6-1.00 X 25mm HEX HEAD CA POINT	 M6-1.00 X 28mm HEX HEAD DOG POINT
 M6-1.25 EXTRUDED U-NUT	 M10-1.50 FREE SPINNING WASHER NUT	 M6-1.00 X 36mm HEX HEAD CA POINT	 M6-3-1.81 X 20mm HEX WASHER TAPPING	 M6-3-1.81 X 25mm HEX WASHER TAPPING
 M10-1.50 EXTRUDED U-NUT	 M6-1.25 X 25mm HEX HEAD CA POINT	 M6-1.25 X 30mm HEX WASHER HEAD	 M6-1.25 X 35mm HEX HEAD CA POINT	 M10-1.50 X 40mm HEX HEAD CA POINT

290 Pcs.



AUTOMOTIVE LICENSE PLATE BOLT ASSORTMENT

85464

 FORD #14 X 5/8 SLOTTED HEX WASHER HD	 #14 X 1/2 ZINC THUMB SCREW	 FORD #14 X 3/4 SLOTTED HEX WASHER HD	 #14 X 3/4 PHILLIPS TRUSS HEAD	 M5-0.80 X 16 PHILLIPS PAN HEAD SCREW
 #14 X 3/8 SLOTTED TRUSS SCREW	 #14 X 3/4 HEX HEAD SLOTTED SCREW	 #14 (4755299) WHITE NYLON NUT	 1/4" WHITE NYLON GROMMET	 M6-1.00 X 12 PHILLIPS PAN HEAD SCREW
 M6-1.81 X 15 LICENSE PLATE SCREW	 M6-1.81 X 16 PHILLIPS HEX HEAD SCREW	 M6 X 20 HHW LICENSE PLATE SCREW	 M6-1.00 X 16 FLANGE BOLT	 M6-1.00 X 16 PHILLIPS PAN HEAD SCREW
 M6-1.0 X 16 NYLON PHILLIPS SCREW	 M6-1.0 X 20 NYLON PHILLIPS SCREW	 M6-1.00 X 20 PHILLIPS PAN HEAD SCREW	 M6-1.00 BLACK NYLON NUT	 M6-1.00 X 20 PHILLIPS PAN HEAD SCREW

595 Pcs.

⚠ WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

AUTOMOTIVE CLIP AND RETAINER TRAY ASSORTMENTS



UNIVERSAL PLASTIC SHIELD RETAINER ASSORTMENT

85681

 1/8" X 3/8" STEM 7/32" HEAD DIA. 28315	 3/16" X 7/16" STEM 23/64" HEAD DIA. 29705	 7/32" X 3/8" STEM 3/8" HEAD DIA. 29976	 7/32" X 5/8" STEM 3/8" HEAD DIA. 29708	 6MM X 12MM STEM 10MM HEAD DIA. 28259	 7/32" X 23/64" STEM 13/32" HEAD DIA. 29704
 3/16" X 5/8" STEM 7/16" HEAD DIA. 28257	 1/4" X 1/4" STEM 29/64" HEAD DIA. 28268	 9/32" X 3/4" STEM 1/2" HEAD DIA. 28318	 21/64" X 39/64" STEM 1/2" HEAD DIA. 29706	 3/8" X 3/4" STEM 5/8" HEAD DIA. 28316	 1/4" X 49/64" STEM 41/64" HEAD DIA. 28059
 5/16" X 5/8" STEM 11/16" HEAD DIA.	 5/16" X 13/16" STEM 11/16" HEAD DIA.	 3/16" X 11/16" STEM 3/4" HEAD DIA.	 5/16" X 1 1/16" STEM 3/4" HEAD DIA.	 5/16" X 1 3/8" STEM 3/4" HEAD DIA.	 11/32" X 7/8" STEM 3/4" HEAD DIA.
 11MM X 28MM STEM 22MM HEAD DIA.	 FITS 1/4" HOLE 20MM STEM LENGTH	 1/4" X 25/32" STEM 1" HEAD DIA.	 1/4" X 1 1/2" STEM 1" HEAD DIA.	 19/64" X 1 1/16" STEM 1" HEAD DIA.	 7/16" X 13/16" STEM 1" HEAD DIA.

420 Pcs.



UNIVERSAL AUTOMOTIVE RETAINER ASSORTMENT

84741

 1/4 (5.4MM) HOLE SIZE 9/16 PANEL RANGE 28673	 1/4 (5.4MM) HOLE SIZE 9/16 PANEL RANGE 28303	 5/16 (7.8MM) HOLE SIZE RADIATOR/WINDSHIELD 28301	 5/16" (8MM) X 20MM STEM 15MM FLANGE DIA. 28461	 3/8" (9.5MM) HOLE SIZE 1/4" PANEL RANGE 28467	 5/16 (8MM) X 20MM STEM 20MM FLANGE DIA. 29813
 5/16" (8MM) HOLE SIZE 9/16" PANEL RANGE 28177	 5/16" (8MM) X 11MM STEM 20MM FLANGE DIA. 28205	 10MM X 13MM STEM 20MM HEAD DIA. 28187	 25/64 (10MM) X 15MM STEM 18MM FLANGE DIA. 28671	 10MM X 18MM STEM 20MM HEAD DIA. 28680	 1/2" (12.7MM) HOLE SIZE 1/8" PANEL RANGE 28675
 1/4" (6.3MM) X 11MM STEM 18MM FLANGE DIA. 28166	 1/4" (6.3MM) X 23MM STEM 17.5MM FLANGE DIA. 28436	 7MM X 12MM STEM 15MM FLANGE DIA. 28282	 8MM X 9MM STEM 20MM FLANGE DIA. 28151	 8MM X 9MM STEM 20MM FLANGE DIA. 28385	 10MM X 27MM STEM 20MM FLANGE DIA.
 8MM X 18MM STEM 20MM FLANGE DIA.	 8MM X 21MM STEM 15MM FLANGE DIA.	 9MM X 27MM STEM 15MM FLANGE DIA.	 10MM X 15MM STEM 20MM FLANGE DIA.	 10MM X 24MM STEM 20MM FLANGE DIA.	

230 Pcs.



FORD AUTOMOTIVE RETAINER ASSORTMENT

85178

 5MM X 10MM STEM 5MM X 15MM HEAD 28482	 5/32" STEM DIA. WEATHERSTRIP RETAINER 28375	 FITS 6.5MM HOLE SIZE 7.05 - 9.5MM PANEL RANGE 28376	 FITS 6.5MM HOLE SIZE 4.5 - 7.9MM PANEL RANGE 28257	 1/4" X 35MM STEM 18MM HEAD DIA. 28449
 5/16" X 13/16" STEM 3/4" HEAD DIA. 28318	 5/16" X 1" STEM 3/4" HEAD DIA. 29706	 11/32" X 3/4" STEM 3/4" HEAD DIA. 28043	 11MM X 28MM STEM 22MM HEAD DIA. 28258	 8MM X 20MM STEM 25MM HEAD DIA. 28443
 1/4" X 25/32" STEM 1" HEAD DIA. 28542	 1/4" X 1 1/2" STEM 1" HEAD DIA. 29919	 5/16" X 7/8" STEM 1" HEAD DIA. 29917	 5/16" X 1 1/2" STEM 1" HEAD DIA. 28545	 5/16" X 11/16" STEM 1 1/4" HEAD DIA. 29761
 5/16" X 1" STEM 1 3/8" HEAD DIA.	 5/8" STEM LENGTH 9/32" HEAD DIA.	 3/8" STEM DIA. 1 3/16" HEAD DIA.	 FITS 5/16" HOLE SIZE 9/16" X 2" HEAD SIZE	 3/8" X 3/4" STEM 1 3/4" HEAD DIA.

260 Pcs.



CHRISTMAS TREE RETAINER ASSORTMENT

84744

 1/8" X 3/8" STEM 7/32" HEAD DIA. 28314	 7/32" X 3/8" STEM 3/8" HEAD DIA. 29705	 3/16" X 7/16" STEM 23/64" HEAD DIA. 29708	 6MM X 12MM STEM 10MM HEAD DIA. 29976	 7/32" X 5/8" STEM 3/8" HEAD DIA. 29964
 7/32" X 23/64" STEM 13/32" HEAD DIA. 29966	 1/4" X 1/4" STEM 29/64" HEAD DIA. 28115	 21/64" X 39/64" STEM 1/2" HEAD DIA. 29704	 9/32" X 3/4" STEM 1/2" HEAD DIA. 29703	 5/16" X 5/8" STEM 11/16" HEAD DIA. 29707
 5/16" X 3/16" STEM 11/16" HEAD DIA. 28042	 7.5MM X 44MM STEM 18MM HEAD DIA. 28318	 1/4" X 49/64" STEM 41/64" HEAD DIA. 28316	 3/16" X 11/16" STEM 3/4" HEAD DIA. 29706	 5/16" X 1 1/16" STEM 3/4" HEAD DIA. 28268
 5/16" X 3/8" STEM 3/4" HEAD DIA.	 1/4" X 25/32" STEM 1" HEAD DIA.	 19/64" X 1 1/16" STEM 1" HEAD DIA.	 1/4" X 1 1/2" STEM 1" HEAD DIA.	 6.4MM X 20MM STEM 25.5MM HEAD DIA.

320 Pcs.



FORD PUSH-IN & SCREW TYPE RETAINER ASSORTMENT

85693

 .230" X .690" STEM .438" FLANGE DIA. 28211	 FITS 1/4" HOLE 15/32" HEAD DIA. 28166	 .250" X .900" STEM .610" FLANGE DIA. 28206	 FITS 1/4" HOLE 11/16" HEAD DIA. 28003	 .250" X .690" STEM .700" FLANGE DIA. 29709
 8MM X 12MM STEM 18MM HEAD DIA. 28378	 8MM X 18MM STEM 20MM HEAD DIA. 28433	 .250" X .900" STEM 1.000" FLANGE DIA. 28450	 FENDER SHIELD PUSH-TYPE 28004	 6.3MM X 45MM STEM 18MM HEAD DIA. 28281
 6MM X 23MM STEM 15MM HEAD DIA. 28028	 8MM X 20MM STEM 15MM HEAD DIA. 28027	 10MM X 12MM STEM 16MM HEAD DIA. 28026	 FITS 1/4" HOLE 3/4" HEAD DIA. 28673	 8MM X 20MM STEM 20MM HEAD DIA. 28399
 FITS 1/4" HOLE 1" HEAD DIA.	 FITS 5/16" HOLE 1" HEAD DIA.	 FITS 1" HOLE 1" HEAD DIA.	 FITS 5/16" HOLE 1" HEAD DIA.	 10MM X 20MM STEM 20MM X 30MM HEAD

210 Pcs.



NYLON AUTOMOTIVE SCREW-TYPE RETAINER ASSORTMENT

85674

 1/4" X 7/8" STEM 11/16" HEAD DIA. 28504	 FITS 5/16" HOLE FRONT COMPARTMENT 28209	 .230" X .690" STEM .430" FLANGE DIA. 28204	 .230" X .690" STEM .438" FLANGE DIA. 28203	 .250" X .470" STEM .438" FLANGE DIA. 28205
 FITS 1/4" HOLE 15/32" HEAD DIA. 28210	 .310" X .800" STEM .585" FLANGE DIA. 28206	 .250" X .900" STEM .610" FLANGE DIA. 28167	 .250" X .690" STEM .700" FLANGE DIA. 28180	 .250" X .900" STEM .700" FLANGE DIA. 28170
 .410" X 1.000" STEM .850" FLANGE DIA. 28211	 .250" X .900" STEM 1.000" FLANGE DIA. 28166	 6MM X 16MM STEM 14MM HEAD DIA. 28296	 7MM X 11MM STEM 14MM HEAD DIA. 28399	 6MM X 11MM STEM 15MM HEAD DIA.
 8MM X 12MM STEM 18MM HEAD DIA.	 8MM X 18MM STEM 20MM HEAD DIA.	 8MM X 21MM STEM 20MM HEAD DIA.	 10MM X 20MM STEM 20MM X 30MM HEAD	

200 Pcs.

⚠WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

FLEET SPECIALS

LED STOP / TURN / TAIL LAMPS

"DRY FIT"

The DryFit Series allows for easy drop-in replacement on vehicles equipped with OEM style harness like the Truck-Lite *Fit N' Forget*® connector. All 12.8 volt, Dry-Fit light feature sealed, moisture proof electronics, superior lens optics and plate brass connectors.



6" OVAL

- Connector - Dry-Fit 3-Pin
- 190mA Stop/15mA Tail
- 6.4" W x 2.2" H x 1.7" D
- 12.8 VDC
- Polycarbonate Material

NEW




Part No.	Description	Grommet No.	Pigtail
3363	9 LED Dry-Fit Stop/Turn/Tail	3426	3422
3365	6 LED Dry-Fit Stop/Turn/Tail	3426	3422

6" OVAL

- LEDs: 9
- Dimensions: 6.4" W x 2.2" H x 1.7" D
- Mounting: Grommet (Part No. **3426**)

NEW



Part No.	Description	Grommet No.	Pigtail
3366	6" Oval Park/Rear Turn	3426	3432

6" OVAL MID TURN

- 28 LEDs, 540/25ma Amp Draw
- 6.5" L x 2.2" W x 2.8" D
- Mount with 6" grommet
- DOT/SAE: J2039, J592e
- Acrylic lens and polycarbonate housing



Part No.	Description	Grommet No.
3361	6" Oval Amber Side Turn/Side Marker	3426

4" ROUND

- 6 LEDs , 12.8 volts, 130ma Amp Draw
- U.S. Patent Numbers: 8,009,364, 8,717,679 B2
- 4.25" Diameter x 1.9" Depth
- Polycarbonate construction

NEW



Part No.	Description	Grommet No.	Pigtail
3359	Dry-Fit Stop/Turn/Tail	3494	3422

BACK-UP LIGHT W/DRY-FIT CONNECTION

- 9 LEDs, 180ma Amp Draw
- U.S. Patent Number 8,009,364
- 4.25" Diameter x 1.9" Depth
- Polycarbonate construction



Part No.	Description	Grommet No.
3360	Dry-Fit Back-Up Light	3494

CONNECTORS

- Use to connect a light with a *Fit N' Forget*® connection to a standard wiring harness



Part No.	Description
3432	Dry Fit Connector

- Use to connect a light with a standard 3-pin connection to *Fit N' Forget*® Harness



Part No.	Description
3433	Dry Fit Connector

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

LED STOP / TURN / TAIL LAMPS

100,000 HOUR RATED LIFE

- High impact polycarbonate lens and housing are sonically welded
- Uses standard 3-pin connector (Part No. **3422**)



Part No.	Description	Plug No.	Grommet No.
3140	6 Diode Red 4"	3422	3494
3150	32 Diode Red 4"	3422	3494
3151	9 Diode Red 4"	3422	3494
3152	9 Diode Amber 4"	3422	3494
3155	9 Diode Red Oval	3422	3426
3141	6 Diode Red Oval	3422	3426
3157	9 Diode Amber Oval	3422	3426

RECTANGLE

- High impact polycarbonate lens and housing are sonically welded
- Grommet mount, sold separately (Part No. **3443**)
- Uses standard 3-pin connector (Part No. **3422**)
- Dimensions: 5.3" W x 3.4" H x 1.8" D



Part No.	Description	Grommet No.	Plug No.
3127	9 Diode Red Rectangle	3443	3422
3128	9 Diode Amber Rectangle	3443	3422
3129	18 Diode Clear Backup	3443	3422

SURFACE MOUNT


- High impact polycarbonate lens and housing are sonically welded
- Hardwired



Part No.	Description
3143	9 Diode Red 4" Round
3145	9 Diode Red 2" x 6" Oval
3147	9 Diode 2" x 6" Oval Backup
3453	21 Diode Rd 5.5" Round w/Backup

LED COMBINATION STOP TURN TAIL LIGHTS

- Smoothly illuminated outer band that surrounds a center LED array that remains unlit during standard taillight operation
- Dual-function outer ring brightens and the central LED array lights only during stop and turn functions
- 21 Diodes
- Grommet mount
- Polycarbonate lens and housing
- Connection: PL-3

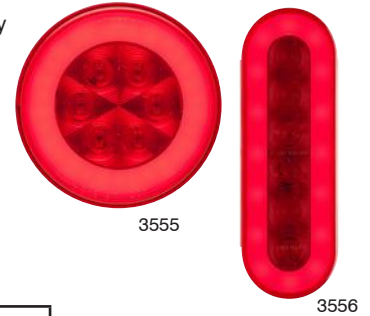

Part No.	Description	Grommet No.	Pigtail
3555	4" Round	3494	3422
3556	6" Oval	3426	3422

LED DOUBLE FACE SQUARE PEDESTAL TURN LIGHT

- Polycarbonate lens; red and amber
- Single post; 3 wire leads
- Sealed moisture corrosion proof electronics
- 21 red LEDs and 21 amber LEDs
- Dimensions 4.50"W x 4.75"H x 2.25"D



Part No.	Description
3552	Passenger Side
3553	Driver Side

6" OVAL STOP TURN TAIL LAMP

- Ultra thin 0.5" low profile design
- Polycarbonate lens & housing
- Completely sealed electronics
- LEDs: 8 red and 4 white
- Mounting 2 hole, grommet
- Connector 2 female PL-3



Part No.	Description	Grommet No.
3451	Oval STT w/ Backup	3434

 **WARNING:** Cancer and Reproductive Harm - www.P65Warnings.ca.gov

FLEET SPECIALS

EMERGENCY / WARNING LIGHTS

LED BEACON SAFETY LIGHTS

FIREBOLT® CLASS 2

- Features an innovative LED emitter that produces a superior warning signal to promote work zone safety
- The amber LED technology in allows for a minimal amp draw while meeting Class 2 standards.
- Designed to meet the demands of a variety of work zones including snow plows, forklifts, utility trucks and construction vehicles
- 14 selectable flash patterns
- Made of a shatterproof polycarbonate dome and base, includes an O-ring to help keep out moisture
- Approvals: SAE J845 Class 2
- 12/72V, Amp Draw: 0.5A @ 12 VDC; 0.25A @ 24 VDC
- Dimensions: 5.1" diameter base x 3.6 " high
- 5 year warranty
- Dual mounting option



Part No.	Description
2700	Permanent Mount
2702	Magnetic Mount

SPIRE® CLASS 1

- Patented LED emitter produces a superior warning signal to promote work zone safety
- Delivers an impressive warning signal while drawing minimal pull on vehicles electrical systems
- Ideal for a variety of applications including DOT, municipal, utility and construction vehicles.
- High powered amber LEDs offer superior 360° visibility
- 25 user selectable patterns, Patented pattern Power Select feature
- 12/24V, 0.75 maximum Amp Draw
- Polycarbonate base and dome
- Dimensions: 6.5" diameter base, dual mounting option
- SAE J845 Class 1 Certified
- 5 year warranty



Part No.	Description	Height
2705	Permanent Mount	6.2"
2706	Magnetic Mount	
2703	Permanent Mount	4.2"
2704	Magnetic Mount	

CLASS 1

- High powered LEDs offer 360° visibility
- 4.6" at base, 3.5" at lens
- 12/24V DC, 1.2A maximum
- 72 Quad-Flashes per minute
- Sonic-welded polycarbonate housing
- 2714 features 60lb. pull magnet, 15' straight cord and plug
- Warranty: 5 Years



Part No.	Description
2713	Amber Permanent Mount LED Beacon
2714	Amber Magnetic Mount LED Beacon

LED STROBE LIGHTS

MICROPULSE™ ULTRA SURFACE MOUNT

- Highly effective, ultra slim, warning light built to stand up to the most punishing conditions
- Offers a versatile solution for supplemental warning light applications
- Superior warning with high-powered amber LEDs
- Low-profile design offers wider range of mounting locations
- 25 selectable flash patterns
- Suitable for external and/or internal mounting applications
- Can be programmed to operate as a single unit or in synchronization with multiple lightheads
- Supplied with black bezel and gasket
- Amp Draw: Single Row, 0.79 @ 12VDC, 0.45 @ 24 VDC
Double Row 1.51 @ VDC, 0.86 @ 24 VDC
- Approvals: SAE J845, Class 1; SAE J595, Class 1
- Operating temperature: -40° to 175°F
- 12/24V



NEW



3487



22700



22701



22702

SINGLE ROW - 5.2" L x 1.26" H x 0.37" D

Part No.	Diodes	Color
3487	6	Amber
22700	12	Amber/White
22701	12	Amber/Blue
22702	12	Amber/Green

- Enhanced optics provide greater visibility from extreme viewing angles



3488

NEW



22704



22705



22706

DOUBLE ROW - 5.25" L x 1.91" H x 0.45" D

Part No.	Diodes	Color
3488	12	Amber
22704	24	Amber/White
22705	24	Amber/Blue
22706	36	Amber/White/Green

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

AUXILIARY LIGHTING

ROUND WORK LIGHTS

- Exceptional work area lighting
- For exterior use on all work equipment, waste and commercial vehicles
- Ultra-bright, long-lasting LED's
- Durable polycarbonate lens
- Operating amperage: 12/24 VDC
- Low amp draw
- Powdered coated aluminum housing, stainless steel mounting bracket
- **Flood** pattern
- Two, 11" wire leads



- 16 LED Diodes
- Dimensions: 4.7" diameter x 1.6" deep

Part No.	Description	Lumens
3185	Round Work Light	2100



- 14 LED Diodes
- Dimensions: 5" x 6.1" x 2.9"

Part No.	Description	Lumens	Volts
3184	Round Work Light	3080	10-30

RUBBER HOUSING

- 1350 Lumens, **flood** pattern
- 4" round with rubber housing
- Auto-selects 12 or 24 volts
- Blunt cut wire leads
- Stainless steel mounting bracket
- Dimensions: 5" x 6.4" x 3.2"



Part No.	Description	Lumens	Voltage
3192	Round Work Light	1350	12 or 24

OVAL WORK LIGHTS

- 1800 Lumens, available in spot or flood pattern
- Powdered coated aluminum housing, stainless steel bracket
- 12" shielded, pinned cables
- Dimensions: 5.8" W x 3.6" H x 2.6" D



Part No.	Pattern	Lumens	Amps 12V/28V	Voltage
3177	Flood	1800	1.77/0.74	10-30
3178	Spot			

RECTANGULAR WORK LIGHTS



- **Flood** pattern, high performance LED's
- Powdered coated aluminum housing, stainless steel bracket and bolt
- Pedestal mount with wire leads
- Auto-selects 12 or 24 volts



- 16 LED Diodes
- Dimensions: 5.9"W x 3.6" H x 1.6" D

Part No.	Lumens	Amps 12V/24V	Voltage
3190	2100	2.4/1.2	10-30



- 6 LED Diodes
- Dimensions: 5.9" W x 3.6" H x 1.6" D

Part No.	Lumens	Amps 12V/36V	Voltage
3187	1400	1.5/0.5	12-36

HIGH OUTPUT MINI FLOOD LIGHT

- Compact square, high-output, LED work flood beam
- Power coated, die cast aluminum housing
- High impact polycarbonate lens
- Sealed coated electronics
- Includes stainless steel mounting bracket & hardware
- Voltage: 12-24V
- Amp Draw: 12V-1.89A, 24V-0.99A



3210



3212

Part No.	Description	Size	Lumens	Voltage
3212	Square Work Light	3.54" x 4.6" x 1.91"	1600	12-24V
3210	Round Work Light	3.54" x 4.52" x 1.97"		

ANGLED LED FLOOD LIGHT

- Durable die-cast aluminum housing and polycarbonate lens
- Surface mount with 2-wire pigtail for hardware installation
- Dust proof and water resistant
- Light emits at 45-degree angle
- 4.33" W x 2" H x 1.38" D
- 6 LED Diodes



Part No.	Description	Lumens
3368	LED Flood Light	1000

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

TRAILER CONNECTORS

4-WAY 5' WIRING KIT


- Molded plastic polarized plugs
- 16 Ga. color coded wires
- Vehicle female 48" leads
- Trailer male 12" leads
- Includes 3 splice connectors



Part No.	Description
42193	4-Way Trailer Connector Kit

4-WAY 24' WIRING KIT

- Molded plastic polarized plugs
- 16 Ga. color coded wires
- Vehicle female 4' leads and 18" ground lead
- Trailer male 20' leads and 18" ground lead
- Includes 6 splice connectors



Part No.	Description
42194	4-Way Trailer Kit

4-POLE MALE AND FEMALE CONNECTOR KIT

- Chrome plated metal male and female 4-Pole ends
- Mounting bracket and hardware
- 4', 16 Ga. color coded wires
- 3 splice connectors



Part No.	Description
42195	4-Pole Trailer Kit

6-POLE MALE AND FEMALE CONNECTOR KIT

- Die cast chrome plated metal plug
- Molded plastic socket and boot
- Mounting bracket and hardware
- 4', 16 Ga. color coded wires
- 5 splice connectors



Part No.	Description
42196	6-Pole Trailer Kit

4-WAY FLAT TO 7-WAY TRAILER ADAPTER

- 4-Way flat male and hardwire connectors with 7-Way RV blade female socket
- 4' long 4-Way connector



Part No.	Description
2912	4-Way/7-Way Trailer Adapter

5-WAY TO 7-WAY TRAILER ADAPTER

- 7-Way RV blade male plug with 5-Way flat female
- Designed for marine type trailers equipped with surge brakes
- Adapts vehicle 7-Way RV blade to trailer 5-Way flat



Part No.	Description
2918	7-Way/5-Way Trailer Adapter

4-WAY FLAT EXTENSION CONNECTOR

- 4 feet long, 18 Ga. Wire
- Used to connect your vehicle to your trailer when your trailer frame is too long



Part No.	Description
42203	4-Way Trailer Extension

TRAILER HARNESS ADAPTERS

- Easily adapts tow vehicle connector to trailer connector
- Non-corrosive full-length plug shell ensures positive latching




Part No.	Description
2926	7 cond. Round / 4 cond. Flat Pin
2919	6 cond. Round / 4 cond. Flat Pin
2920	7 cond. Blade / 4 cond. Flat Pin
2921	7 cond. Blade / 5 cond. Flat Pin

⚠ WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

TRAILER CONNECTORS AND CABLE

PARALLEL PRIMARY WIRE

- Conductors bonded together for ease in handling
- Conforms to SAE specifications & boat industry association color coding standards
- Maximum 50 volts
- 100 Ft. rolls

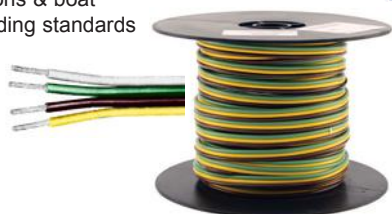

Part No.	Size	No. Conductors	Color
4178	16 Gauge	2 Conductor	Black, Red
4179	14 Gauge	2 Conductor	Black, Red
4180	16 Gauge	3 Conductor	Green, Yellow, Brown
4181	14 Gauge	3 Conductor	Green, Yellow, Brown
4182	16 Gauge	4 Conductor	Green, Yellow, Brown, White
4183	14 Gauge	4 Conductor	Green, Yellow, Brown, White

JACKETED PRIMARY WIRE

- Excellent for wiring truck, bus, tractor & boat circuits
- Maximum 50 volts
- Gray jacket, 100 Ft. rolls



Part No.	Size	Color
4220	16/2 Gauge	Black, White
4221	14/2 Gauge	Black, White
4222	12/2 Gauge	Black, White
4219	10/2 Gauge	Black, White
4224	16/3 Gauge	Black, White, Green
4225	14/3 Gauge	Black, White, Green

7-WAY TRAILER CABLES

COILED CABLE WITH CABLE GUARD

- All cables have abrasion resistant duraflex jackets, 12" leads
- 12507 features 40" pigtail for easier handling
- Flexible in temperatures to -85°F (-65°C)



Part No.	Length	Gauges
12591	15 Ft.	6/14 - 1/12
12505 *	15 Ft.	4-12, 2-10, 1-8
12507 *	15 Ft.	4-12, 2-10, 1-8 w/ 40" Pigtail

*SAE J2394 for ABS systems

PLUG CIRCUIT CHECKERS

- Checks conductivity of all circuits for J560 system
- LED lights glow when circuit is functioning correctly
- Internally grounded
- Quickly identify lighting problems prior to leaving yard




Part No.	Description
2903	6 Pole - Round Pin
2904	7 Pole - Blade

TRAILER ADAPTERS

7-WAY BLADE TYPE TO 6-WAY ROUND

- Converts 7-way blade to 6-way round



Part No.	Description
2917	Center Brake Pin
2922	Center Auxiliary Pin

TRAILER CONNECTION TESTER

4 CONDUCTOR FLAT

- Plugs into connector of tow vehicle and illuminates when connections are correct
- Tests to SAE standards or flat 4-way functions for tail light, stop/turn lights, and ground



Part No.	Description
41947	4 Cond. Flat Tester


WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

FLEET SPECIALS

WINDSHIELD WIPER BLADES / CLEANER

SCRUBBLADE

- Double blade design provides excellent all-weather performance by scrubbing and wiping simultaneously
- Patented scrubber design removes bugs, dirt and road debris from your windshield for a clear safe view
- All season performance and fast, easy installation
- Highest laboratory rated blade available, even after 500,000 cycles
- Reduces driver fatigue by eliminating glare from a dirty windshield

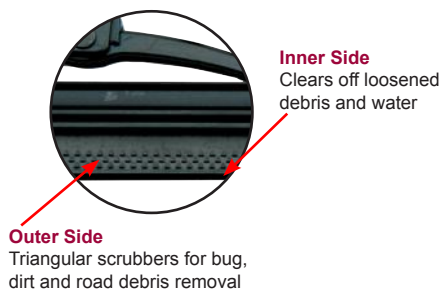

PLATINUM BLADES

- High-quality silicone blades with advanced scrubbing technology and resistant to extreme temperatures and chemicals
- Ceramic coated blades for quiet operation
- Sleek design for easy, tool-free installation



NEW

Part No.	Size
29032	16"
29034	18"
29036	20"
29037	21"
29038	22"
29039	24"
29040	26"

Part No.	Description
87719	2 Each: 16-26"

HEAVY DUTY SERIES

- Rubber blades with Nano graphite coating
- Includes a universal adapter that fits most vehicles
- J-hook connection only



Part No.	Size
28905	16"
28906	17"
28907	18"
28909	20"
28910	21"
28911	22"
28912	24"
28913	26"

Part No.	Description
87741	3 Each: 16-26"



WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

TIFCO IMMACULATE™ GLASS CLEANER

TIFCO IMMACULATE™ may be used as dilutable cleaner for maintenance of all glass surface areas, inside and outside. Also may be used effectively as a windshield washer solvent down to 32°F.

- Cleans and brightens glass without streaking
- Economical, dilutes with up to 6 parts of water
- Safe for all glass surfaces, chrome, porcelain and formica

Part No.	Description
9686	Case of 4 (1 Gallon Bottles)



WINDSHIELD SOLVENT CONCENTRATE

- Cleans and brightens glass without streaking
- **Not for sale in California**
- Effective to -20°F

Part No.	Description
7895	Case of 12 (12 oz. Bottles)



WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

WASHER FLUID TABLETS

- Patented effervescent technology provides more cleaning power
- No freeze protection, mild weather use only
- Each tablet makes one gallon of washer fluid
- Controlled foam



Part No. Box of 100	Part No. Box of 25	Description
7897	7898	Windshield Solvent Tablets

GLASS-KLEEN

AMMONIA FORTIFIED GLASS CLEANER

GLASS KLEEN foams and polishes glass and any other hard surfaces quickly without leaving any residue. GLASS-KLEEN's powerful ammonia formula is ideal for heavy build up and can even be used to remove paint overspray.

- Removes road film, grease, grime, bugs, and even paint overspray
- Leaves a non-glare and non-streak finish
- Easy application - spray on - wipe off
- Foaming action cleans vertical surfaces easily
- 20 fl. oz., 19 oz. net wt.



NOTE: Do not use on tinted windows or Plexiglas

Part No.	Description
7600	Case of 12 Aerosol Cans
9900	1/2 Case of 6 Aerosol Cans



WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

AUTOMOTIVE CHEMICALS

PURGE® PLUS

HIGH STRENGTH CLEANER

TIFCO PURGE® PLUS is a highly effective blend of solvents that are fast drying, non-conductive and safe to use on metal. Does not contain CFC's or HCFC's and is ozone safe. Use to remove dirt, grease, oil, and grime from circuit boards, computers, magnetic tapes, printed circuits, gauges, switches and relays.

- Non corrosive to metal
- Dries quickly
- Removes grease, grime, oil
- Cleans electronic and mechanical parts
- **CALIFORNIA COMPLIANT FORMULA**
- 20 fl. oz., 14 oz. net wt.



NEW



Part No.	Description
8165	Case of 12 Aerosol Cans
9935	1/2 Case of 6 Aerosol Cans

ORGANI-SOLVE


AEROSOL DEGREASER

ORGANI-SOLVE® is a heavy-duty, industrial-strength degreaser that quickly dissolves and removes grease, oil, roofing compound, bitumen and more. Can be used on road machinery, building and maintenance equipment, masonry, concrete, industrial and construction equipment, metal parts, tools and much more.

- Safe and effective on most surfaces
- Contains no chlorinated solvents or ozone depleters
- 20 fl. oz., 17 oz. net wt.



NEW



Part No.	Description
8179	Case of 12 Aerosol Cans
9881	1/2 Case of 6 Aerosol Cans


WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

TIF-SOLV

HEAVY DUTY CITRUS SOLVENT DEGREASER

TIF-SOLV is our most powerful citrus degreaser especially designed to quickly remove and flush away grease, tar, oil and grime from all types of surfaces. This product is for the professional that needs a strong degreaser/adhesive remover that contains no chlorinated solvents or highly toxic chemicals.

- TIFCO's Strongest citrus degreaser
- Environmentally safe - contains no chlorinated or fluorinated solvents
- Slower dry time - can be brushed or scrubbed
- Quickly removes grease, oil and grime, adhesives, asphalt, and road tar
- Can be used on masonry/concrete
- Includes nozzle straw for pinpoint application
- 20 fl. oz., 14 oz. net wt.



Part No.	Description
8178	Case of 12 Aerosol Cans
9925	1/2 Case of 6 Aerosol Cans


WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

GRIP-N-KLEEN

HEAVY DUTY ENGINE DEGREASER

GRIP-N-KLEEN formulated to remove dirt, oil, tar and heavy buildup from all types of engines. Heavy foam expands for outstanding grease removal. Fast acting and easy rinsing for a clean bright surface.

- Removes grease, grime, oils and tar
- Superior degreasing ability
- Non-chlorinated
- Rinses clean with water
- Expands and cleans tight areas
- 20 fl. oz., 16 oz. net wt.



Part No.	Description
8180	Case of 12 Aerosol Cans
9926	1/2 Case of 6 Aerosol Cans

FLEET SPECIALS

HOSE CLAMPS AND ASSORTMENTS

T-BOLT CLAMPS

- 300 series stainless steel band
- High strength, one piece stainless steel trunnion
- Heat treated 1/4"-28 plated steel T-bolt and locknut yields great strength, weather resistance, and ease of assembly
- Superior welded construction with welded liner
- Meets SAE Spec. J1508 for T-bolt clamps

BREEZE



Box QUANTITY: 5

Part No.	Effective Range (in)
5440	2 - 2 5/16
5441	2 1/4 - 2 9/16
5442	2 1/2 - 2 13/16
5443	2 3/4 - 3 1/16
5444	3 - 3 5/16
5445	3 1/4 - 3 9/16
5446	3 1/2 - 3 13/16
5447	3 3/4 - 4 1/16
5448	4 - 4 5/16
5449	4 1/4 - 4 9/16
5450	4 1/2 - 4 13/16
5451	4 3/4 - 5 1/16
5452	5 - 5 5/16
5454	5 1/2 - 5 13/16
5455	5 3/4 - 6 1/16
5456	6 - 6 5/16

HIGH TORQUE - ALL S/S HOSE CLAMPS

- Extra thick 304 stainless band and housing
- Extra long 410 stainless screw engages eight threads at all times
- Withstands 150 in/lb. torque on the screw, three times more than regular clamps
- Completely vibration proof and rust proof, virtually indestructible
- Slotted hex screw accepts screwdriver, socket or wrench



Part No.	Effective Range (in)
4562	5/8 - 1 1/2
4563	1 1/4 - 2 1/8
4564	1 3/4 - 2 5/8
4565	2 1/4 - 3 1/8
4585	2 3/4 - 3 5/8
4566	3 1/4 - 4 1/8
4586	3 3/4 - 4 5/8
4567	4 1/4 - 5 1/8
4587	4 3/4 - 5 5/8
4568	5 1/4 - 6 1/8

RACK PART NO.
87823

2 1/4" - 5 1/8" ID

CONTENTS: 10 x
4565
4585
4566
4586
4567



50 Pcs.

THUMB SCREW CLAMPS

- The original perforated stainless steel worm-drive clamp for aircraft and industrial applications with a thumb wing tightening screw
- 9/16" Band with Arcial Perforations and Quadra-Lock Construction
- Meets SAE Standard J1508 Type F
- 410 Stainless Steel Safety Screw
- 300 Series stainless steel, 9/16" Band
- 300-Series SS Two-Piece housing



Part No.	Size	Min O.D.	Max O.D.
24078	8	1/2	29/32
24080	12	11/16	1 1/4
24081	16	13/16	1 1/2
24082	20	13/16	1 3/4
24083	24	1 1/16	2"
24085	32	1 9/16	2 1/2
24087	40	2 1/16	3"
24089	48	2 9/16	3 1/2
24091	56	3 1/16	4"
24092	64	3 9/16	4 1/2

SPRING ACTION HOSE CLAMPS

- Material: Heat-treated spring steel
- Finish: Phosphate
- Spring action clamps automatically tighten for low pressure application



21073



21074



21075

Part No.	Hose O.D.	Width	Color
21073	3/8"	5/16"	Black
21074	7/16"	5/16"	Green
21075	1/2"	5/16"	Red
21076	9/16"	5/16"	Black
21077	5/8"	5/16"	Olive
21079	3/4"	3/8"	Black



21077



21073
SPRING ACTION
3/8" HOSE OD

21076
SPRING ACTION
9/16" HOSE OD

24080
S/S WING SCREW
NO. 12
11/16" - 1 1/4"

24083
S/S WING SCREW
NO. 24
1 1/16" - 2"

21074
SPRING ACTION
7/16" HOSE OD

21077
SPRING ACTION
5/8" HOSE OD

24081
S/S WING SCREW
NO. 16
13/16" - 1 1/2"

24085
S/S Wing Screw Hose Clamp
No. 32

21075
SPRING ACTION
1/2" HOSE OD

21079
SPRING ACTION
3/4" HOSE OD

24082
S/S WING SCREW
NO. 20
13/16" - 1 3/4"

120 Pcs.

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

HOSE TUBING CONNECTOR ASSORTMENTS



1/8" - 3/16" NYLON HOSE CONNECTOR ASSORTMENT

85980

29770 1/8 HOSE I.D.	29771 3/16 HOSE I.D.	29755 3/16 HOSE I.D. RESTRICTOR	29787 3/16 H X 1/8 H REDUCER	29788 1/8 H X 1/4 H REDUCER
29775 1/4 H X 3/16 H REDUCER	29772 1/4 H X 1/4 H	29790 3/16 HOSE I.D. 90°	29838 3/16 H X 1/8 H 90° REDUCER	29839 1/4 H X 3/16 H 90° REDUCER
29786 3/16 HOSE I.D. "Y"	29724 3/16 HOSE I.D. 4-WAY TEE	29782 1/8 HOSE I.D. TEE	29777 5/32 HOSE I.D. TEE	29723 3/16 HOSE I.D. TEE
29722 1/4 HOSE I.D. TEE	29784 1/8 H X 1/8 H X 1/4 H TEE	29785 3/16 H X 3/16 H X 1/8 H TEE	29797 1/8 H X 3/16 H X 1/8 H TEE	29798 1/4 H X 3/16 H X 3/16 H TEE

195 Pcs.



1/4" - 3/8" NYLON HOSE CONNECTOR ASSORTMENT

85981

29772 1/4 HOSE I.D.	29773 5/16 HOSE I.D.	29774 3/8 HOSE I.D.	29783 1/8 - 3/8 HOSE I.D.	29788 1/4 H X 1/8 H REDUCER
29775 1/4 H X 3/16 H REDUCER	29776 3/8 H X 1/4 H REDUCER	29826 1/2 X 3/8 H REDUCER	29839 1/4 H X 3/16 H 90° REDUCER	29833 1/4 HOSE I.D. 90°
29834 3/8 HOSE I.D. 90°	29794 1/4 HOSE I.D. "Y"	29722 1/4 HOSE I.D. TEE	29781 5/16 HOSE I.D. TEE	29780 3/8 HOSE I.D. TEE
29784 1/8 H X 1/8 H X 1/4 H TEE	29798 1/4 H X 3/16 H X 3/16 H TEE	29799 3/8 H X 1/4 H X 3/8 H TEE	29789 3/8 H X 3/8 H X 1/4 H TEE	29769 1/8 - 3/8 HOSE I.D. TEE

175 Pcs.



NYLON HOSE TEE & CONNECTOR ASSORTMENT

85339

29770 1/8 HOSE I.D. CONNECTOR	29771 3/16 HOSE I.D. CONNECTOR	29772 1/4 HOSE I.D. CONNECTOR	29773 5/16 HOSE I.D. CONNECTOR
29774 3/8 HOSE I.D. CONNECTOR	29787 3/16 H X 1/8 H REDUCER	29788 1/4 H X 1/8 H REDUCER	29775 1/4 H X 3/16 H REDUCER
29776 3/8 H X 1/4 H REDUCER	29782 1/8 HOSE I.D. TEE	29777 5/32 HOSE I.D. TEE	29722 1/4 HOSE I.D. TEE
29781 5/16 HOSE I.D. TEE	29780 3/8 HOSE I.D. TEE	29769 1/8 - 3/8 HOSE I.D. TEE	29783 1/8 - 3/8 HOSE I.D. CONNECTOR

125 Pcs.



VACUUM CAPS AND HOSE CONNECTOR ASSORTMENT

85691

29726 1/8 TUBE O.D. X 9/16" CAP	29728 3/16 TUBE O.D. X 9/16" CAP	29727 1/4 TUBE O.D. X 9/16" CAP	29730 5/16 TUBE O.D. X 1 1/4" CAP	29729 3/8 TUBE O.D. X 1 1/4" CAP	28156 1/2 TUBE O.D. X 1 1/16" CAP
29770 1/8 HOSE I.D.	29771 3/16 HOSE I.D.	29772 1/4 HOSE I.D.	29773 5/16 HOSE I.D.	29774 3/8 HOSE I.D.	29820 1/2 HOSE I.D.
29782 1/8 HOSE I.D. TEE	29723 3/16 HOSE I.D. TEE	29722 1/4 HOSE I.D. TEE	29781 5/16 HOSE I.D. TEE	29780 3/8 HOSE I.D. TEE	29835 1/2 HOSE I.D. TEE
29731 1/4 TUBE O.D. X 1 1/4" CAP	28370 5/16 TUBE O.D. X 9/16" CAP	29790 3/16 HOSE I.D. 90°	29833 1/4 HOSE I.D. 90°	29834 3/8 HOSE I.D. 90°	29835 1/2 HOSE I.D. 90°

235 Pcs.



VACUUM CAP & TUBE CONNECTOR ASSORTMENT

84660

29726 1/8 TUBE OD X 9/16" CAP	29728 3/16" TUBE OD X 9/16" CAP	29727 1/4" TUBE OD X 9/16" CAP	29731 1/4" TUBE OD X 1 1/4" CAP
28370 5/16" TUBE OD X 9/16" CAP	29730 5/16" TUBE OD X 1 1/4" CAP	29729 3/8" TUBE OD X 1 1/4" CAP	28156 1/2" TUBE OD X 1 1/16" CAP
29770 1/8 HOSE ID	29771 3/16 HOSE ID	29772 1/4 HOSE ID	29773 5/16 HOSE ID
29774 3/8 HOSE ID	29820 1/2 HOSE ID	29783 1/8 - 3/8 HOSE ID	29769 1/8 - 3/8 HOSE ID

150 Pcs.

TIFCO VACUUM / FUEL LINE HOSE RACK ASSORTMENT



Part No.	7/64" - 7/16" Hose I.D.	Pieces
87828	7/64, 5/32, 7/32 & 9/32 I.D. 50 Ft. Vacuum 1/4, 5/16, 3/8 & 7/16 I.D. 25 Ft. Fuel Line	8

⚠ WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

FLEET SPECIALS

DEUTSCH CONNECTORS

DEUTSCH DT SERIES CONNECTORS

- Unmatched Quality And Reliability
Field proven connections are ideal for heavy duty applications where a reliable connection is crucial.
- Environmentally Sealed - Front & Back
Silicone plug completely seals out moisture, dust, dirt and other contaminants keeping critical circuits clean, dry and in operation.
- Audible Click Engagement
Positive engagement creates a click ensuring proper fitting and alignment.
- Watertight Fitting
Even in complete immersion* Deutsch connections stay dry for worry-free electrical connections.
- Outstanding Heat Resistance
Withstands temperatures up to 260° F for use in engine compartments or other high temperature areas.
- Secure And Vibration Proof
Locking tabs keep plug together eliminating accidental disconnect.
- Applications
Ideal for under the hood, engine mount, transmission, chassis or other demanding, harsh conditions, Rated at 13 amps, continuous capacity, -67° F to 260° F

* Tested submersion in 3 feet of water

RECEPTACLE WEDGE LOCK



27814

REPLACEMENT PLUG FRONT SEAL



27734

PLUG WEDGE LOCK



27820

SEAL PLUG



27829

PLUG



RECEPTACLE

Number of Contacts	Housing		Wedge Lock		Replacement Plug Front Seal	*Seal Plug
	Receptacle	Plug	Receptacle	Plug		
2	27800	27806	27812	27818	27731	27829
3	27801	27807	27813	27819	27732	
4	27802	27808	27814	27820	27733	
6	27803	27809	27815	27821	27734	
8	27804	27810	27816	27822	27735	
12	27805	27811	27817	27823	27736	

* Use seal plug 27829 for unfilled ports in housings

SIZE 16 CONTACTS

Part No.	Wire Gauge	Description
27825	16-20	Pin
27826	16-20	Socket
27827	14	Pin
27828	14	Socket



DT DEUTSCH CONNECTOR ASSORTMENT

84820

27800 2-#16 RECEPTACLE HOUSING	27801 3-#16 RECEPTACLE HOUSING	27802 4-#16 RECEPTACLE HOUSING	27803 6-#16 RECEPTACLE HOUSING	27825 16-20 GA PIN CONTACT	27834 UNIVERSAL REMOVAL TOOL 27829 - SEALING PLUGS
27806 2-#16 PLUG HOUSING	27807 3-#16 PLUG HOUSING	27808 4-#16 PLUG HOUSING	27809 6-#16 PLUG HOUSING	27826 16-20 GA SOCKET CONTACT	
27812 2-#16 RECEPTACLE WEDGELOCK	27813 3-#16 RECEPTACLE WEDGELOCK	27814 4-#16 RECEPTACLE WEDGELOCK	27815 6-#16 RECEPTACLE WEDGELOCK	27827 14 GA PIN CONTACT	
27818 2-#16 PLUG WEDGELOCK	27819 3-#16 PLUG WEDGELOCK	27820 4-#16 PLUG WEDGELOCK	27821 6-#16 PLUG WEDGELOCK	27828 14 GA SOCKET CONTACT	

190 Pcs.



DT DEUTSCH CONNECTOR ASSORTMENT

84825

27825 16-16 GA PIN	27800 2-#16 RECEPTACLE	27801 3-#16 RECEPTACLE	27802 4-#16 RECEPTACLE	27803 6-#16 RECEPTACLE	27804 8-#16 RECEPTACLE	27805 12-#16 RECEPTACLE	27829 SEALING PLUG
27826 16-16 GA SOCKET	27806 2-#16 PLUG	27807 3-#16 PLUG	27808 4-#16 PLUG	27809 6-#16 PLUG	27810 8-#16 PLUG	27811 12-#16 PLUG	
27827 16-14 GA PIN	27812 2-#16 RECEPTACLE WEDGELOCK	27813 3-#16 RECEPTACLE WEDGELOCK	27814 4-#16 RECEPTACLE WEDGELOCK	27815 6-#16 RECEPTACLE WEDGELOCK	27816 8-#16 RECEPTACLE WEDGELOCK	27817 12-#16 RECEPTACLE WEDGELOCK	
27828 16-14 GA SOCKET	27818 2-#16 PLUG WEDGELOCK	27819 3-#16 PLUG WEDGELOCK	27820 4-#16 PLUG WEDGELOCK	27821 6-#16 PLUG WEDGELOCK	27822 8-#16 PLUG WEDGELOCK	27823 12-#16 PLUG WEDGELOCK	

221 Pcs.



DT DEUTSCH CONNECTOR ASSORTMENT

84821

27825 16-20 GA. PIN CONTACT	27800 2-#16 RECEPTACLE HOUSING	27801 3-#16 RECEPTACLE HOUSING	27802 4-#16 RECEPTACLE HOUSING	27803 6-#16 RECEPTACLE HOUSING	27804 8-#16 RECEPTACLE HOUSING
27826 16-20 GA. SOCKET CONTACT	27806 2-#16 PLUG HOUSING	27807 3-#16 PLUG HOUSING	27808 4-#16 PLUG HOUSING	27809 6-#16 PLUG HOUSING	27810 8-#16 PLUG HOUSING
27827 14 GA. PIN CONTACT	27812 2-#16 RECEPTACLE WEDGELOCK	27813 3-#16 RECEPTACLE WEDGELOCK	27814 4-#16 RECEPTACLE WEDGELOCK	27815 6-#16 RECEPTACLE WEDGELOCK	27816 8-#16 RECEPTACLE WEDGELOCK
27828 14 GA. SOCKET CONTACT	27818 2-#16 PLUG WEDGELOCK	27819 3-#16 PLUG WEDGELOCK	27820 4-#16 PLUG WEDGELOCK	27821 6-#16 PLUG WEDGELOCK	27822 8-#16 PLUG WEDGELOCK

176 Pcs.

⚠ WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

TOGGLE SWITCHES AND FUSES

TOGGLE SWITCHES

- Plastic housing and paddle handle
- Stem and mounting hardware are black nylon 66
- Mounting stem has 15/32"-32 thread
- Fits panels up to 1/4" thick
- 20A 12V DC, .250" Terminals



Part No.	Description	Contact	Function
2991	Toggle Switch	SPST	OFF-Mon, On
3016	Toggle Switch	SPST	OFF-On
3017	Toggle Switch	SPDT	On-On
3018	Toggle Switch	SPDT	On-OFF-On



LED ILLUMINATED

Part No.	Description	Contact	Function	Off-On Switch Color
3024	LED Toggle Switch	SPST	OFF-On	Amber
3025	LED Toggle Switch	SPST	OFF-On	Green
3026	LED Toggle Switch	SPST	OFF-On	Red
3027	LED Toggle Switch	SPST	OFF-On	Blue

RECTANGULAR ROCKER SWITCHES

- Housing: Black Nylon 66
- 27.6mm x 13.8mm
- 20A 12V DC, 10A 24V DC
- .250" Blade Terminals



Part No.	Description	Contact	Function
3051	Rocker Switch	SPST	On-OFF
3052	Rocker Switch	SPDT	On-OFF-On
3053	LED Rocker Switch	SPST	On-OFF

ROUND ROCKER SWITCHES

- Housing: Black Nylon 66
- 25/32" (20mm) Mounting Hole
- 20A 14V DC
- .187" Blade Terminals



Part No.	Description	Contact	Function
3035	Round Rocker Switch	SPST	On-OFF
3038	Round Rocker Switch	SPST	On-OFF
3041	Round Rocker Switch	SPDT	On-OFF-On
3043	Round Rocker Switch SPDT	SPDT	On-OFF-On

LED ILLUMINATED

Part No.	Description	Off-On Switch Color
3075	LED Round Rocker Switch	Amber
3076	LED Round Rocker Switch	Green
3077	LED Round Rocker Switch	Red
3078	LED Round Rocker Switch	Blue



ROCKER AND TOGGLE SWITCH ASSORTMENT

85846

3035 SPST OFF-ON	3038 SPST OFF-MOM. ON	3041 SPDT ON-OFF-ON	3043 SPDT MOM. ON-OFF-MOM. ON
3075 SPST OFF-ON AMBER	3076 SPST OFF-ON GREEN	3077 SPST OFF-ON RED	3078 SPST OFF-ON BLUE
3051 SPST RECTANGULAR OFF-ON	3052 SPDT RECTANGULAR ON-OFF-ON	3053 SPST RECTANGULAR OFF-ON RED	3016 SPST OFF-ON
3017 SPDT ON-ON	3018 SPDT ON-OFF-ON	3024 SPST OFF-ON AMBER	3025 SPST OFF-ON GREEN

32 Pcs.

BLADE FUSES

MAXI™ 32V LOW PROFILE

- Miniature design utilizes less space
- Easily check for blown fuse with see-through housing
- Measure resistance with checkpoints on top without removing the fuse

MAXI™ 32V

Amps	Color	Low Profile	
		10/Box	1/Pk
20	Yellow	43041	43001
25	Gray	43042	43002
30	Green	43043	43003
35	Brown	43044	43004
40	Orange	43045	43005
50	Red	43046	43006
60	Blue	43047	43007
Handy Pak		86166	

ACTUAL SIZE



Standard



Low Profile



70 Pcs.

86166

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

FLEET SPECIALS

TAPE AND WIRE LOOM

AUTOMOTIVE HARNESS CLOTH TAPE

PET cloth tape with a solvent-free acrylic adhesive. It provides excellent abrasion protection of automotive harnesses and withstands high temperatures and demanding environmental conditions. Acrylic adhesive is compatible with new halogen-free cable jacketing materials and provides enhanced durability at high temperatures.

- Excellent cable compatibility
- Flame retardant
- Tear-resistant

NEW



Part No.	Size
4191	0.35" x 82 Ft. Roll (9mm x 25m)

LINERLESS SPLICING TAPE

- Can be used on cables when emergency overload can reach 275°F (130°C)
- For low and high voltage - through 69KV
- Flame retardant with high thermal conductivity for cooler splices
- Can be used on polyethylene, cross-link polybutyl rubber, oil-based rubber, EPR, PVC and other solid dielectrics



NEW

Part No.	Size
2412	1" x 30 Ft. Roll

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

FRICTION TAPE

TEMFLEX COATED COTTON

- Coated cotton fabric provides high abrasion and cut-through protection on wire and cable splices
- Withstands a temperature range of 15 to 175°F
- RoHS 2011/65/EU
- Excellent resistance to salt water
- High tensile strength and low stretch
- Width: 3/4"
- Length: 60'

NEW

Applications:

- Bundle and bind wires and cables
- Create wire harnesses
- Wrap tool handles for better grip



Part No.	Description	3M No.
4258	3/4" x 60 Ft.	1755

MAXX GRIP

- Heavy duty 8.5-mil tape
- Extra thickness provides added electrical properties, quicker insulation build up and abrasion resistance
- Flame-retardant, cold and weather-resistant with superior cold-weather handling features
- Resistant to abrasion, salt, alkalies, acids and ultraviolet rays



Part No. Roll	Part No. Dispenser of 10	Size
4284	4280	3/4" x 66 Ft. Roll

SPLIT WIRE LOOM

- Split seam feature allows for easy wire insertion and repair
- Flame and heat retardant, temperature range -40°F to 200°F
- Protects wire from abrasion, grease, oil and extreme weather conditions



4199

SPOOLS

Part No.	Size	Spool Dia.
4197	1/4" x 100 Ft.	7"
4196	3/8" x 50 Ft.	7"
4198	3/8" x 100 Ft.	10"
4199	1/2" x 50 Ft.	7"
4200	1/2" x 100 Ft.	10"
4201	5/8" x 50 Ft.	10"
4202	5/8" x 100 Ft.	13"
4205	3/4" x 50 Ft.	10"
4203	3/4" x 100 Ft.	13"
4204	1" x 50 Ft.	13"

RACK ASSORTMENT



Part No.	Description	Pieces
87826	1/4, 3/8, 1/2, 5/8 I.D. 100 Ft 3/4 & 1" I.D. 50 Ft Poly Split Loom	6

PUSH-TO-CONNECT FITTINGS



D.O.T. AIR BRAKE

COMPOSITE BODY

- Field serviceable, fast, easy, reusable, one-piece fittings
- Internal tube supports, DOT approved
- Lightweight composite body is impact and corrosion resistant
- Ergonomically designed small dimension bodies
- O-ring seal with no flow restriction
- Compatible with SAE J844 A&B nylon air brake tubing

Temperature Range: -40°F to 200°F (-40°C to 93°C)

Working Pressure: Up to 250 P.S.I.

Style	Part No.	Tube Size	Metric Thread
	35500 *	1/4	M10 x 1.0
	35501 *	1/4	M12 x 1.5
	35502 *	1/4	M16 x 1.5
	35504 *	3/8	M12 x 1.5
	35521 *	1/4	M12 x 1.5
	35522 *	1/4	M16 x 1.5
	35523 *	1/4	M22 x 1.5
	35524 *	3/8	M12 x 1.5
	35525 *	3/8	M16 x 1.5
	35526 *	3/8	M22 x 1.5
	35527 *	1/2	M12 x 1.5
	35528 *	1/2	M16 x 1.5
	35529 *	1/2	M22 x 1.5
	35536 *	5/8	M22 x 1.5

NEW

*Indicates New Item

Temperature Range: -40°F to 140°F (-40°C to 60°C)

Working Pressure: Up to 145 P.S.I.

	35682 *	5/32
	35800	1/4
	35801	3/8
	35802	1/2
	35803	5/8
	35804	3/4
	35808	1/4
	35809	3/8
	35810	1/2
	35811	5/8
	36642 *	1/4 x 1/4
	36643 *	1/2 x 1/4

*Indicates New Item

PUSH-TO-CONNECT AB FITTING ASSORTMENT

85944

 PUSH-TO-CONNECT AB MALE CONN 1/4" x M10-1.0	 PUSH-TO-CONNECT AB MALE ELBOW 1/4" x M12-1.5	 PUSH-TO-CONNECT AB MALE ELBOW 3/8" x M16-1.5	 PUSH-TO-CONNECT AB MALE ELBOW 1/2" x M22-1.5	 PUSH-TO-CONNECT AB UNION TEE 1/4" TUBE
 PUSH-TO-CONNECT AB MALE CONN 1/4" x M12-1.5	 PUSH-TO-CONNECT AB MALE ELBOW 1/4" x M16-1.5	 PUSH-TO-CONNECT AB MALE ELBOW 3/8" x M22-1.5	 PUSH-TO-CONNECT AB UNION 1/4" TUBE	 PUSH-TO-CONNECT AB UNION TEE 3/8" TUBE
 PUSH-TO-CONNECT AB MALE CONN 1/4" x M16-1.5	 PUSH-TO-CONNECT AB MALE ELBOW 1/4" x M22-1.5	 PUSH-TO-CONNECT AB MALE ELBOW 3/8" x M12-1.5	 PUSH-TO-CONNECT AB UNION 1/2" TUBE	 PUSH-TO-CONNECT AB UNION TEE 1/2" TUBE
 PUSH-TO-CONNECT AB MALE CONN 3/8" x M12-1.5	 PUSH-TO-CONNECT AB MALE ELBOW 3/8" x M16-1.5	 PUSH-TO-CONNECT AB MALE ELBOW 1/2" x M16-1.5	 PUSH-TO-CONNECT AB UNION 1/2" TUBE	 PUSH-TO-CONNECT AB MALE RUNTEE 1/2" x 1/4"

44 Pcs.

NYLON - AIR BRAKE TUBING

SAE J844 Type A - Single wall extruded Nylon (1/8", 5/32" and 1/4" size)

SAE J844 Type B - Extruded Nylon inner tube, one layer of open ply nylon fiber reinforcement and a nylon outer cover. (3/8", 1/2", 5/8" and 3/4" size)

TYPICAL APPLICATIONS: Air brake systems except where temperatures exceed +200°F or where battery acid can drip on tubing

TEMPERATURE RANGE: -40°F to +200°F MAX.



BLACK TUBING

Part No. 100' Rolls	Part No. 50' Rolls	Part No. 25' Rolls	Dimensions (Inches) O.D.
	4370	4376	1/8
	4389	4390	5/32
	4388	4391	3/16
4382	4371	4377	1/4
4383	4372	4378	3/8
4384	4373	4379	1/2
	4374	4380	5/8
	4375	4381	3/4



COLOR TUBING

Part No. 100' Rolls	Part No. 50' Rolls	Dimensions (Inches) O.D.	Color
12550	12570	1/4	Red
12551	12571		Blue
12552	12572		Green
12555	12575	3/8	Red
12556	12576		Blue
12557	12577		Green
	12580	1/2	Red
	12581		Blue
	12582		Green

RATCHET STYLE HOSE & TUBING CUTTER

- Ratcheting style for quick cutting
- For use with PVC, ABS, PEX pipe and vacuum/heater tubing
- Die-cast handles feature quick release mechanism to easily open cutters for use
- Replacement Blade Part Number: 12140
- Size Range: Up to 1"



Part No.	Size
38196	Tubing Cutter

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

FLEET SPECIALS

GASKETING CHEMICALS

Permatex

NO LEAK RTV SILICONE GASKET ULTRA BLUE® (77BR)

Sensor-safe, low odor, non-corrosive. Outstanding oil resistance and joint movement valves. Eight times more flexible than cork/composite gaskets; three times more oil resistant than conventional silicones. Temperature range -75° to 500°F intermittent; resists auto and shop fluids and vibration. Guaranteed not to leak.



Case of 12	Individual	Description
Part No.	Part No.	
9123	9143	3.35 oz. Tubes

HI-TEMP RTV SILICONE GASKET ULTRA COPPER® (101BR)

For 4-cylinder, turbocharged or high-performance engines. The most advanced, high temperature RTV silicone gasket available. Sensor-safe, low odor, non-corrosive. Superior adhesion. Three times more oil resistant than conventional silicones; eight times more flexible than cut gaskets. Temperature range -75° to 700°F intermittent; resists auto and shop fluids and vibration. Guaranteed not to leak.



Case of 12	Individual	Description
Part No.	Part No.	
9124	9144	3 oz. Tubes

RED (26BR/26C)

OEM Specified. Formulated for hi-temp applications, or heavy-duty use (such as towing, etc.). Replaces almost any cut gasket by making reliable "formed-in-place" gaskets that resist cracking, shrinking and migrating caused by thermal cycling. Coats pre-cut gaskets to increase reliability. Temperature range: -75°F to 400°F (-54°C to 343°C) intermittent; resists auto and shop fluids.



Case of 12	Individual	Description
Part No.	Part No.	
9168	9188	3 oz. Tubes
9169	9189	11 oz. Cartridges

SUPER "300" FORM-A-GASKET® - No. 83 (83H)

A brushable, non-hardening sealant for assembly work on high compression engines, diesel heads, cover plates, high speed turbine superchargers, automatic transmissions and gaskets. Resists transmission fluids, glycols, mild salt solution, water, steam, aliphatic hydrocarbons, synthetic lubricants, petroleum base hydraulic fluids, aviation fuels. Temperature range -65° to 425°F, pressures to 5,000 psi.



Part No.	Description
9178	4 oz. Can

FORM-A-GASKET® - No. 2 (2B/2C)

A black, non-hardening, heavy-bodied, pliable sealant for semipermanent assemblies. Use on cover plates, flanges, threaded assemblies and hose connections. Ideal for metal-to-metal assemblies. Allows easy disassembly. Temperature range -65° to 400°F, pressures to 5,000 psi. Conforms to MIL-S-45180B (ORD) Type II



Part No.	Description
9174	3 oz. Tube

RIGHT STUFF® GASKET MAKER

- Leak-proof gaskets can be put into service in just one minute
- Latest technology resists blowouts, outperforms pre-cut gaskets
- OEM specified domestic and import formulas
- Temp Range: -75°F to 450°F (continuous)
500°F (intermittent)
- Sensor safe, resists ATF, oil, coolant and other shop fluids



APPLICATIONS

Valve Covers
Oil Pans
Transmission Pans
Thermostat Housings
Water Pumps

ORIGINAL (DOMESTIC)

General Motors
Ford
Daimier/Chrysler
Mercedes Benz
Marine Use



Case of 6	Individual	Description
Part No.	Part No.	
9132	9136	7.5 oz. Power Bead™ Can
9120	9140	10.1 oz. Cartridge

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

GLOVES

PREMIUM GRADE SPLIT BACK COWHIDE



DRIVERS GLOVES

- Premium cowhide provides high levels of durability and flexibility
- Double palm, thumb and index finger for long wearing durability and cushioning
- Kevlar stitches for strong, durable seams
- Ergonomic wing thumb offers superior dexterity and comfort
- Rolled leather cuff for longer wear
- Shirred elastic back

NEW



Size	Part No. Pair	Part No. Dozen
Medium	6126	906126
Large	6128	906128
X-Large	6129	906129

PROGRIP® AGILE GRIP NITRILE PALM DIPPED



SUPERIOR ABRASION AND OIL/CHEMICAL RESISTANCE

- Thin nylon knit shell coated with a closed cell nitrile palm for a good dry, wet, or oily grip
- Nitrile palm provides abrasion and outstanding chemical resistance and will not degrade when exposed to oil
- Seamless nylon knit liner eliminates seams that can rub or chafe
- Outstanding dexterity and unparalleled comfort and breathability



Size	Part No. Pair	Part No. Dozen
Medium	6193	2567
Large	6194	2568
X-Large	6210	2569

DURAIDE™ M-PACT DRIVERS GLOVES



- High-tensile strength cut liners provide 360° ANSI A4 blade-cut resistance
- Duraide™ performance leather construction protects your hands with extreme abrasion resistance
- Keystone thumb
- Gunn cut glove for heavy material handling
- TPR impact protection
- Elastic Cuffs



Part No.	Size
20931	Medium
20932	Large
20933	X-Large
20934	2X-Large

PROGRIP® MAX-GRIP FULL DIP



- Super lightweight, breathable microfoam, nitrile dipped nylon glove
- Extremely comfortable, conformable
- Excellent dry grip, dexterity and sensitivity
- Washable without shrinking or stiffness



Size	Part No. Pair	Part No. Dozen
Large	6815	906815
X-Large	6816	906816
2X-Large	6830	906830

HI-VIZ IMPACT MECHANICS GLOVES



- TPR impact protection meets EN 13594 impact standard
- TPR pinch-point fingertip protection
- TPR closure provides a secure fit
- High-visibility TrekDry® keeps hands cool and comfortable
- Reflective print provides eye-catching luminance in low-light environments
- Armortex® palm reinforcement provides added durability
- Reinforced index finger and thumb deliver added durability where you need it most
- Touchscreen capable synthetic leather keeps you connected while you work
- D3O® palm padding absorbs and dissipates high-impact energy through the palm
- Machine washable



Part No.	Size
20999	Medium
21000	Large
21001	X-Large
21003	2X-Large

SPEEDKNIT™ HI-VIZ D3O® M-PACT GLOVES



- High visibility 15-gauge knit nylon construction protects against skin abrasions
- Comfortable compression cuffs provide a secure fit
- Patented D3O® Impact Print™ technology protects with ANSI 138 Level 3 impact resistance
- Rugged sandy nitrile palm coating with textured grip offers high abrasion resistance and dry grip performance
- Durability performance meets ANSI Level 3 abrasion standard
- REACH Compliant.
- Machine washable and dryable



Part No.	Size
20916	Medium
20917	Large
20918	X-Large

⚠ WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

FLEET SPECIALS

AC O-RING KITS

HEAVY DUTY TRUCK AIR CONDITIONING ORGANIZERS

- Refillable A/C part system loaded with over 700 service parts
- Designed for heavy truck/fleet vehicle coverage
- Includes R-134a service caps, valves, primary seals, slim line, orifice tubes, retro-fit parts, washers, gaskets and more
- Full o-ring coverage



Part No.	Description
46311	Heavy Duty Fleet Organizer

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

Contains:

Box #1 Box #3 (CONTINUED) Box #5 (CONTINUED)

Qty.	Part No.	Qty.	Part No.	Qty.	Part No.
3	46320	5	46380	4	46263
3	46321	5	46399	4	46264
3	46254	5	46372	4	46265
3	46312			4	46266
3	46313			4	46267
3	46322			4	46268
3	46323			4	46490
3	46324			4	46491
3	46255			4	46492

Box #2

Qty.	Part No.	Qty.	Part No.	Qty.	Part No.
4	46415	5	46432	4	46343
4	46416	5	46468	4	46344
25	46369	5	46469	4	46345
25	46371	5	46444	4	46346
25	46373	5	46404	4	46495
25	46375	5	46459	4	46496
4	46417	20	46410	4	46428
4	46418	5	46460	4	46429
		20	46450	4	46479
		5	46449	4	46480
		5	46411		
		5	46383		
		5	46374		
		5	46472		
		5	46384		
		5	46436		
		20	46471		
		5	46451		
		20	46452		

Box #3

Qty.	Part No.	Qty.	Part No.
5	46394	25	46351
5	46367	4	46352
5	46395	4	46353
5	46456	4	46354
5	46368	4	46483
20	46442	4	46484
5	46401	4	46258
5	46431	4	46259
5	46403	4	46260
5	46402	4	46261
5	46378	4	46262
20	46406		
5	46396		
5	46457		
20	46446		
5	46443		
5	46409		
5	46470		
5	46370		
20	46447		
5	46397		
5	46445		
5	46379		
5	46398		
5	46463		
5	46462		
5	46458		
20	46448		
20	46405		
5	46440		
5	46408		

Box #5

Qty.	Part No.
25	46351
4	46352
4	46353
4	46354
4	46483
4	46484
4	46258
4	46259
4	46260
4	46261
4	46262

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



A/C LEAK DETECTION



SPOTGUN™ LEAK DETECTION KIT

Kit includes everything you need to find a leak in a vehicle with a R-134a A/C system

- UV Phazer NEO™ rechargeable leak detection light
- Spotgun™ injector
- R-134a injection coupler
- 8 oz. cartridge of UV dye
- UV dye glasses
- Service stickers



Part No.	Description
7945	Spotgun™ R-134a Leak Detection Kit



SPOTGUN JR.™ LEAK DETECTION KIT

Kit includes everything you need to find a leak in a vehicle with a R-134a A/C system

- UV Phazer NEO™ battery powered light
- Spotgun Jr.™ injection gun
- R-134a injection coupler
- (4) 1 oz. cartridges of UV dye
- UV dye glasses
- Service stickers



Part No.	Description
7946	Spotgun Jr.™ R-134a Leak Detection Kit



SPOTGUN™ R-134a DYE INJECTION KIT

- Spotgun™ injector
- 8 oz. cartridge of UV dye
- R-134a injection coupler
- Service stickers



Part No.	Description
7964	Spotgun™ R-134a Dye Injection Kit



SPOTGUN JR.™ R-134a DYE INJECTION KIT

- Spotgun Jr.™ injector
- (2) 1 oz. cartridge of UV dye
- R-134a injection coupler
- Service stickers



Part No.	Description
7971	Spotgun Jr.™ R-134a Dye Injection Kit



SPOTGUN™ R-1234yf DYE INJECTION KIT

- Spotgun™ injector
- 8 oz. cartridge of UV dye
- R-1234yf injection coupler
- Service stickers



Part No.	Description
7992	Spotgun™ R-1234yf Dye Injection Kit



SPOTGUN JR.™ R-1234yf DYE INJECTION KIT

- Spotgun Jr.™ injector
- (6) 1/4 oz. cartridge of UV dye
- R-1234yf injection coupler
- Service stickers



Part No.	Description
7965	Spotgun Jr.™ R-1234yf Dye Injection Kit



WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

FLEET SPECIALS

AIR CONDITIONING PRODUCTS

ESTER OIL + U/V DYE

- Contains U/V leak detector dye --detect leaks with any standard black light
- Includes o-ring conditioner, proprietary anti-wear and anti-oxidant additives
- Compatible with PAG and mineral oils
- Compatible with R-134a and R-12 refrigerant



Part No.	Description
7972	Case of 12 (8 oz. bottles)
7973	Individual (8 oz. bottle)

PAG OIL + U/V DYE

- 100% synthetic PAG lubricant with U/V dye
- Technologically advanced formula designed for maximum moisture resistance
- Meets or exceeds OEM specifications
- Specially formulated for O.E. and aftermarket air conditioning systems using R-134a refrigerant
- Contains conditioners, inhibitors and anti-wear agents for superior lubricity and compressor protection
- Longer-lasting PAG resists sludge formation
- More stable and less corrosive than other PAGs
- U/V dye can be detected using any standard black light



Part No.	Description
7974	PAG 46 Case of 12 (8 oz. bottles)
7975	PAG 46 Individual (8 oz. bottles)
7976	PAG 100 Case of 12 (8 oz. bottles)
7977	PAG 100 Individual (8 oz. bottles)

PREMIUM BLUE

Part No.	Description
7962	PAG Blue Case of 12 (8 oz. bottles)
7963	PAG Blue Individual (8 oz. bottles)

PAG OIL + UV DYE FOR R-1234yf

- Synthetic lubricant specially formulated for A/C systems using R-1234yf refrigerant
- Advance high performance PAG lubricant provide excellent resistance to moisture
- Contains conditioner, inhibitors & anti-wear agents
- Provides excellent lubricity and compressor protection
- Contains UV Dye for Leak Detection
- 8 oz. bottle



Part No.	Description
8006	PAG 46 Case of 12 (8 oz. bottles)
8007	PAG 46 Individual (8 oz. bottle)
8012	PAG 100 Case of 12 (8 oz. bottles)
8013	PAG 100 Individual (8 oz. bottle)

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



tifco industries

AUTOMOTIVE EPOXY

SEAM SEALER EPOXY

- Thick-set non-sag
- Extremely flexible adhesive sealant for horizontal and vertical seams and joints
- Can be used to reinforce and eliminate flutter and vibration of body panel cross members
- Adheres to bare or primed metal, SMC, FRP, fiberglass, aluminum and most plastics
- Each tube includes 2 mixer tips
- Use with 7 oz. dual cartridge gun sold separately (Part no. 7752)
- Working time: 15-20 minutes Handling 20-30 minutes, Sandable 45 minutes Paintable immediately
- Full Cure time: 6-8 hours



Part No.	Description
7738	Case of 6 - 6.75 oz. Tubes
7739	Individual 6.75 oz. Tube

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

PLASTIC BONDING ADHESIVE

A fast-set plastic bonding adhesive used for bonding and repairing small panels, bumper tabs, headlamp buckets, header panels, grills, consoles, arm rest supports, and much more! Our automatic mixing system eliminates errors which are common in manual mixing. Dispenses with any IES 200mL cartridge applicator gun.

Working time: 1-2 Min.
Clamp time: 10-15 Min.
Sandable/Paintable time: 30 Min.
Full cure: 24 Hours
Mixed color: Black



Part No.	Description
7746	Case of 6 - 6.75 oz. Kits
7747	Individual 6.75 fl. oz. Kit (200ml)

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



tifco industries
THE RIGHT PART IN THE RIGHT PLACE AT THE RIGHT TIME

tifco.com

Phone: 800.868.4326
tifco@tifco.com

Main Office: Houston, TX
Branch Office: Reno, NV

THE RIGHT PART, IN THE RIGHT PLACE, AT THE RIGHT TIME



AF# 191628
07/01/2025 v20